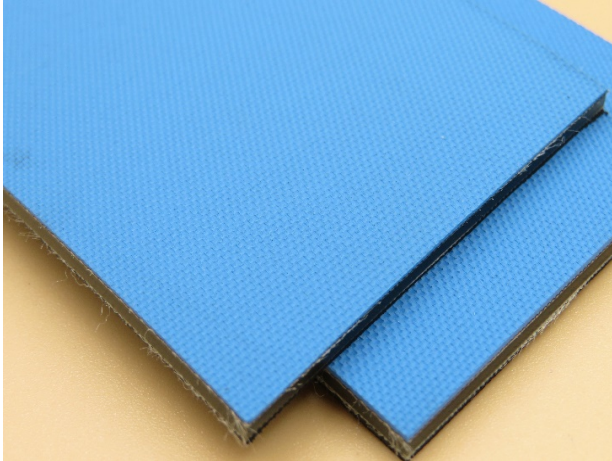



Technical Datasheet		PolyBelt™	Power Transmission and Conveyor Belt
		Belt type	<b>LA-750</b>
PB-157 Ver.3			
<b>Applications</b>			
▪ General transmission belt			
<b>Construction</b>			
		Top side	Bottom side
		NBR	NBR
		0.3mm	0.3mm
		Rough pattern	Rough pattern
		Blue	Blue
		Tension member	Splice
		Polyamide	Skiver
		Film	
		0.75mm	
		Construction	
<b>Dimensions</b>		<b>Properties</b>	
Width/Roll (max.)	325mm	<b>Minimum pulley diameter</b>	<b>Tensile properties</b>
Width/Endless (max.)	300mm	Power Transmission Application	Tensile strength
Length (max.)	105m	Skiver	225N/mm
Total thickness	2.25mm	Conveyor Application	Elongation at break
Weight	2.5 Kg/m <sup>2</sup>	Skiver	20%
Please contact Nitta if you need other dimensions.			Maximum allowable tension
<b>Regulatory compliance</b>			33.6N/mm
RoHS(2011/65/EC, (EU)2015/863)			Maximum allowable elongation
			3.0%
<b>Features</b>		<b>Dynamic properties</b>	<b>Coefficient of friction</b>
Antistatic		Standard elongation	Top vs. Steel
Superior abrasion resistance			0.5~0.6
Superior oil resistance		Tension after relaxation at 2.0%	vs. Paper
Light colored on both covers		11.2N/mm	0.6~0.7
Thin (Light) rubber type		Initial tension at 3.0%	Bottom vs. Steel
		33.6N/mm	0.5~0.6
		Tension after relaxation at 3.0%	vs. Paper
		16.8N/mm	0.6~0.7
		Operating temperature range	vs. Lagged pulley
		-20~80°C	0.7~0.9
		Operating temperature range*	vs. POM (resin)
		-20~80°C	0.5~0.7
		*When under continuous use	
<b>NITTA CORPORATION</b>			